


KB9100

Programmable Touch Bump Bar

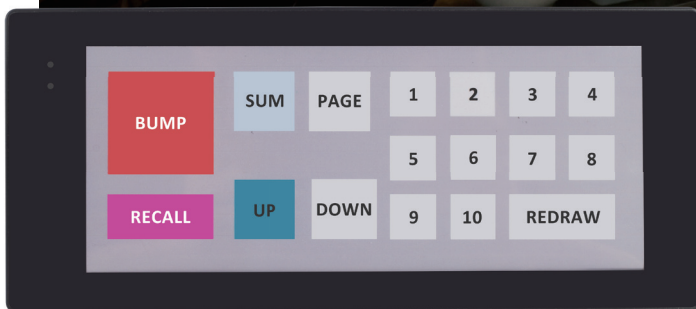

Features and Benefits

- / PCAP technology
- / Interchangeable legend sheet
- / Customizable legend sheet with advanced user friendly software
- / Flexible layout: number of keys, key dimensions and key locations
- / USB interface

Specification

KB9100		
CHARACTERISTICS	Key Operations	Projected Capacitive Touch
	Number of keys	64 maximum
	Key code memory	Around 1,400 key strokes total
	Key layout area	6.93in x 2.52in (176mm x 64mm)
	Key operation feedback	Audio beep and LED indicator
	Reliability	>30 million touch operations
MECHANICAL	Net weight without bracket	0.59 lbs (0.27Kg)
	Net weight with bracket	1.17 lbs (0.53Kg)
	Dimension without bracket (W x D x H)	8.54" x 3.54" x 1.06" (217 x 90 x 27mm)
	Dimensions with bracket attached (W x D x H)	8.54" x 4.21" x 2.56" (217 x 107 x 65mm)
	Mounting options	Angle bracket and VESA mounting (75mm)
ELECTRICAL	Input voltage	5VDC
	Current consumption	125mA max, 80mA nominal
ENVIRONMENTAL	Operating temperature	0 °C to 50 °C
	Relative humidity	80% max, non-condensing
INTERFACE CABLES	PS/2	RJ-to-PS/2 or RJ-to-RJ cable (for LS6000/LS6100)
	USB	RJ-to-USB (Type A)



Contact

<http://www.poindus.com>

Poindus Systems Corp.

Taiwan (HQ) | Germany | UK | Iberica

5F., No. 59, Ln. 77, Xing-Ai Rd., Neihu Dist., Taipei City 114, Taiwan. R.O.C.

☎ +886 2 7721 4688 🖨 +886 2 7721 2289 ✉ sales@poindus.com

Poindus
COMPAL GROUP