

Crafted with Precision, Designed for Simplicity



Powerful Computing for Outstanding Performance



The integrated Al accelerator architecture provides up to 13 TOPS of computing power.



Al-Powered Voice Interaction



AI-Powered Facial Recognition



Al-Powered Loss Prevention


Flexible Combinations for Every Need

Designed to meet diverse business scenarios.





















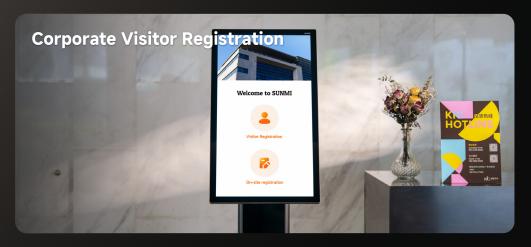



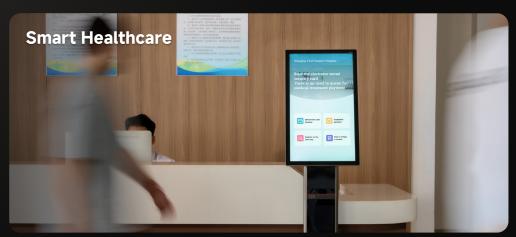








Personalized customization to meet the diverse brand needs.







Three Sizes Interactive Display



FLEX 3 18.5"



FLEX 3 22"



FLEX 3 27"

14 Types of Stands and Functional Accessories

Functional Accessories



Indicator Light



4G Module







Stands

Camera include Mond lar, or 3D Cam







Restaurant Version Floor Stand Desktop Stand



Desktop Stand



Lite Desktop Stand (L-Shaped)

SUNMI FLEX 3 SPEC

os

SUNMI OS 4.0

Network

LAN 1000M

CPU

octa-core, up to 2.7GHz Standard Version: Qualcomm octa-core. up to 2.4GHz

Memory

Premium Version: 6GB RAM+128GB ROM 4GB RAM+64GB ROM

Card Reader

NFC: Tap on screen

External Memory

1* MicroSD (TF Card) Extended Micro SD Card Slot Up to 2TB

Audio

2*3W Speaker 2*Microphone

Wi-Fi

Premium Version: 6GHz/5GHz/2.4GHz, IEEE 802.11 a/b/g/n/ac/ax Standard Version: 5GHz/2.4GHz, IEEE 802.11 a/b/g/n/ac

Bluetooth

Premium Version: Bluetooth 5.2, Support BLE BT Long Range (farthest Bluetooth 5.0, Support BLE

Button

1*Power button

Ports

4*Micro USB 1*Type-C Debug port 2*RJ45 (Gigabit Ethernet)

- 1*RS485/RS232

Adapter

Input: 100 ~ 240V AC Output: 20V/3.5A

Accessories (Optional)

Indicator Light NFC & MSR & Scanner Monocular / Binocular / 3D Camera Stand(Option: Printer, Scanner) POE Module **POS Bracket** VESA 100*100

Protection

IP54

Environment

Operating Temperature: 0°C~40°C

Storage Temperature: -20°C~60°C Operating Humidity: 5% to 95% non-condensing

	FLEX 3 18.5"	FLEX 3 22"	FLEX 3 27"
Product Model	F9J1A/F9J2A	F961A/F962A	F9E1A/F9E2A
Size	443*264*29.8 mm	511*303*29.8 mm	646*384*29.8 mm
Displays	18.5" FHD, 1920*1080, IPS, 400 nits Capacitive Multi-touch Screen, Anti-fingerprint Coating	22" FHD, 1920*1080, IPS, 400 nits Capacitive Multi-touch Screen, Anti-fingerprint Coating	27" FHD, 1920*1080, IPS, 400 nits Capacitive Multi-touch Screen, Anti-fingerprint Coating

^{*}Retail version floor stand and desktop stand are only compatible with 22" interactive display