




BARCODES FOR BUSINESS

BCB-8220

BCB Elite Range
Wireless 2D tough scanner

Elite scanning - dust, water, drop proof

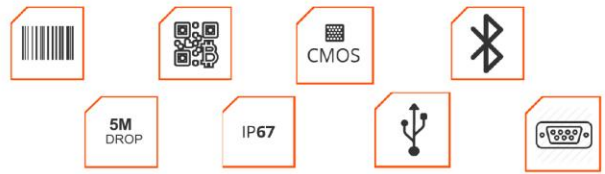

Premium scanning without the premium price

No need to compromise on cost when you can have a high end, well protected scanner for general use at an affordable price. With wireless operation up to 100 metres plus delivering at 300 scans per second, it gives fast, snappy and reliable reading results.

Advanced protection

Up to an IP67 sealing means the BCB-8220 can be washed directly with tap water without interfering with the scanners operation. Also able to withstand drops of 5m, the BCB-8220 is robust enough to handle the toughest working environments.



Comfortable and practical

The comfortable hand grip of the BCB-8220 has been designed with a perfect curvature so it fits nicely into the hand, thus reducing user fatigue over periods of continual use.

Not only is the scanner ascetically pleasing but it has been built to last; the high rebound scan trigger is both comfortable and durable and can withstand being pressed millions of times without jamming. The clear audio and visual good read indicators enable fast, uninterrupted scanning no matter the environment.

Applications

- logistics
- medical
- clothing
- manufacturers
- supermarkets / stores
- food



BCB-8220 Technical Specification

Light sources	LED (630nm ± 10nm)
Image resolution	800 x 600 pixels
Depth of scan field	0-350mm (0.33m, pcs 90%)
Scan speed	≥ 350 scans/second
Scan Precision	3mil (0.076mm)
Decoding capability	1D: EAN-13, EAN-8, UPC-A, UPC-E, Code 39, Code 93, Code 128, EAN-128, Codabar, Industrial 2 of 5, Interleave 2 of 5, Matrix 2 of 5, MSI, China postal code, GS1 and all 1D barcodes. 2D: PDF417, Micro PDF417, Composite Codes, TLC-39, Data matrix, Maxi code, QR code, Micro QR code, Aztec
Interfaces	RS232, USB, USB-COM
Print contrast	Minimum 20% reflective difference
Light	300 LUX (130mm)
Error rate	≤1/50 million
Indicator	Buzzer, indicator light
Scanning mode	Manually/Continuously/Automatically
Storage ability	350000 barcodes
Work Frequency	2.4G wireless + Bluetooth
Scanner size	184mm(L) x 74mm(W) x 93mm(H)
Weight	405g including cradle
Shell material	ABS + PC + TPU
Voltage	5V
Operating current	290mA
Static current	20mA
Electromagnetic compatibility	CE, FCC DOC compliance
Operating temperature	-20°C-50°C
Storage temperature	-40°C-60°C
Relative humidity	5%-95% (non condensing)
Environment luminance	0-10000lux
Drop resistance	Withstands multiple times from 5 metres to concrete
Packaging level	IP65 standard, IP67 optional

BARCODES FOR BUSINESS LTD.

Unit 5, Deans Close, Steventon,
Oxfordshire, OX13 6SZ
United Kingdom (UK)
Phone: 01494 810 101
Email: sales@barcodesforbusiness.co.uk
Website: www.barcodesforbusiness.co.uk